

## Lubriplate<sup>®</sup> FGL-1 Food Grade Grease

Applied Industrial Technologies keeps the Food Industry InSync<sup>®</sup> with Lubriplate's Class H-1 Food Grade Grease. FGL-1 is FDA compliant and designed for complete food processing lubrication capability. Formulated from high quality base oils combined with unique, premium, anti-rust and anti-corrosion ingredients, this lubricant exceeds the performance specifications of most conventional H-2 lubricants.

### Food Processing Applications:

- Bearing lubrication
- Any area where grease is applied to machinery and there is risk for incidental food contact

### Features/Benefits:

- **Manufactured with ingredients that comply with FDA Regulation 21 CFR 178.3570** for lubricants with incidental food contact
- **Fortified with anti-wear, anti-rust and anti-corrosion additives** and heavy base oils which combine to give excellent load carrying capability
- **Excellent resistance to water washout and caustic washdown**
- **Available in four NLGI densities**



# Applied and Lubriplate® InSync® with High Quality Food Grade Lubricants

## Greases

### Food Grade (Class H-1)

#### Pure Tac

- Tacky, adhesive, highly water resistant, USDA authorized grease designed for applications subjected to chemically treated water, heat and steam
- Ideal for all types of medium to slow speed bearings, open gears and hydrostatic cooker chains

### Non Food Grade (Class H-2)

#### 730-2

- High performance lubricant formulated to provide high load carrying ability and anti-wear protection with a high resistance to water, steam and other corrosive action
- Available in four NLGI densities



## Gearing/Worm Gearing Lubricants

### Food Grade (Class H-1)

#### FMO-2400 AW

- USP white mineral oil, excellent for worm gearing applications
- Anti-wear fortified and USDA authorized for use where class H-1 oil is required
- Manufactured in nine ISO grades for a variety of applications

### Non Food Grade (Class H-2)

#### SPO-277

- Ideal for industrial applications such as gear cases, bearings, chains, machine ways and general oiling
- Provides anti-wear lubrication for high sliding action in worm gears
- Excellent for bevel, helical and spur gears and can be used with silver alloy, copper and copper alloy bearings
- Great for use in high moisture and high temperature applications



## Food Machinery Lubricants/Oil


### Food Grade (Class H-1)

#### FMO-350 AW

- Anti-wear fortified and USDA authorized for use where a class H-1 oil is required
- Manufactured in nine ISO grades for a variety of applications



Contact Your Local Authorized Service Center  
**1-877-279-2799**

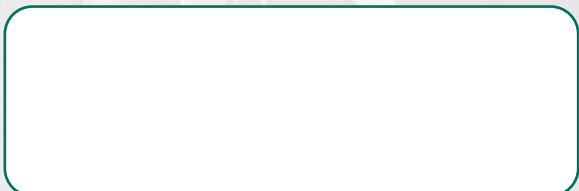

**APPLIED**  
Industrial Technologies®

*Value Through Innovation*

One Applied Plaza  
Cleveland, Ohio 44115-5000  
Toll Free Phone: 1-877-279-2799  
www.appliedindustrial.com